

fire hose reel Fire hose reel cabinet swivel



Product features:

Reference: -

EAN13: -

Model: Diamètre 19 mm / Longueur 20 m,
Diamètre 19 mm / Longueur 30 m, Diamètre
25 mm / Longueur 20 m, Diamètre 25 mm /
Longueur 30 m

fire hose reel en Armoire - Fire hose reel Pivoting and rotating for maximum safety

Protect your premises effectively with our **fire hose reel en armoire**, a fire safety device designed to guarantee rapid, effective intervention in the event of a fire. Adapted to the requirements of ERP (Établissements Recevant du Public), industries and tertiary buildings, this **Fire hose reel pivoting and rotating** ensures optimal coverage and increased maneuverability.

Why choose our fire hose reel en Armoire?



- **Optimum safety:** Compliant with NF EN 671-1 standards and NF certified, guaranteeing reliability and performance.
- **Rotating and pivoting system:** Makes it easy to orientate the hose for a better grip when working.
- **Robust cabinet:** Steel construction with corrosion-resistant coating for long service life.
- **Easy installation and maintenance:** Ergonomic design for quick access and easy maintenance.
- **Versatile use:** Suitable for industrial, commercial and ERP environments, with different configurations available.

Technical specifications Fire hose reel (fire hose reel) in a cabinet

- **Pivoting and rotating hose reel** with axial feed for optimal handling.
- **20 to 30-meter semi-rigid hose**, compliant with NF EN 694 standard, offering extended intervention range.
- **Handheld nozzle** With adjustable stream water flow can be adjusted to suit the nature of the fire.
- **Optimized pressure and flow rate** for maximum efficiency (130 L/min at 2.5 bar).
- **Heavy-duty metal cabinet** available in various sizes, with wall-mounted or floor-standing options.

Cabinet dimensions Fire hose reel (fire hose reel)

Features	AP 19/20 DMA	AP 19/30 DMA	AP 25/20 DMA
Item code	32984	33246	33637
Nominal diameter	19		
Pipe length	20 m	30 m	20 m
Dimensions in mm			
Height A	702		
Width B	703		
Depth C	288		
Width open door D	1360		
Opening radius (+depth) E	945		
Connection F	3/4 "F		
Range in metres at 0.2 Mpa at stopcock :			
Straight jet	10 m		
Diffused jet	3 m		
Empty weight	42 kg	45 kg	48 kg
N.F EN 671-1 certification	RC/02/005		

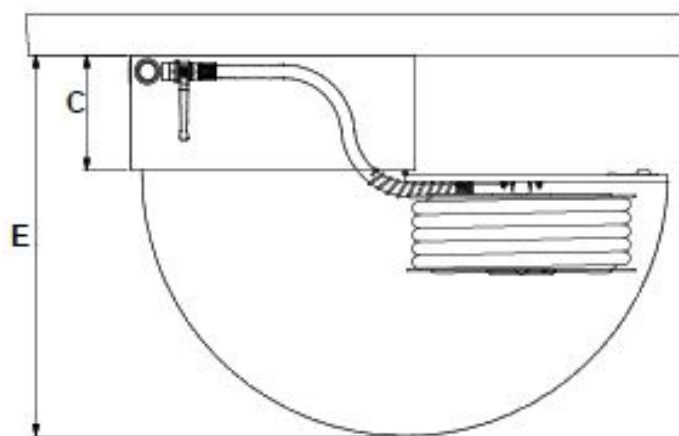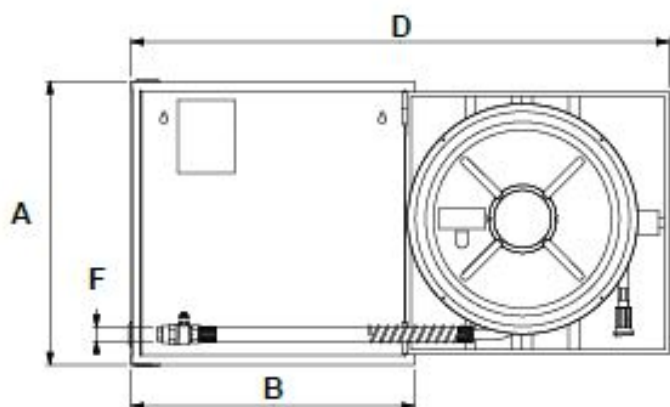

Installation and maintenance of your fire hose reel

Our Fire hose reel pivoting and rotating cabinet is designed for **quick installation** and **easy maintenance**. It meets the requirements of **NF EN 671-3** and **APSAD R5** recommendations to ensure optimal long-term operation.

Order your fire hose reel en Armoire from MMF today!

Guarantee the protection of your premises with a reliable and certified **fire hose reel en armoire**. Contact us for more information on our fire safety solutions tailored to your needs.